
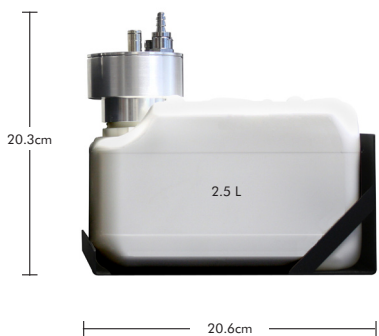


# ScentStream

SXD-2010 HVAC SCENT DIFFUSION SYSTEM

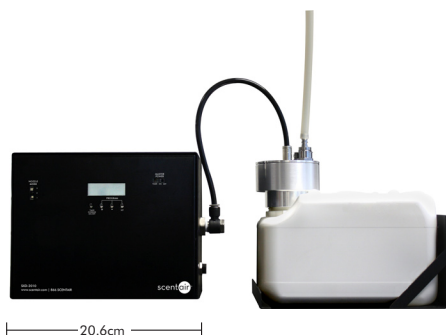

The ScentAir ScentStream is ideal for creating ambient scent environments in large business settings. The advanced diffusion technology releases fragrance into existing heating and air conditioning ventilation systems without sprays, aerosols or heated oils. Adjustable duration and intensity settings make it easy to customize the scent output for any environment.

#### Product Features:

- Virtually silent operation
- Selectable output for 1,2 or 3 nozzles
- Features patent-pending fragrance optimization system
- Provides coverage for areas with an air volume of up to 6,000 cubic meters
- Twenty-four hour clock with variable cycle times
- Simple and clean replacement of scent oil
- Mounting options include: Anti-vibration wall mounts as well as a ceiling bridge for above ceiling installs
- 1L, 2.5L, 5L and 10L container options
- Thousands of quality scents to choose from

#### ScentStream SXD-2010 Technical Specifications

Dimensions	20.6cm W x 16.5cm H x 12.7cm D (25.7cm W w/ wall mounts installed)
Weight	3.67 kg
Coverage	Up to 6,000 cubic meters
Variable Output	Up to 4.5mL per hour
Variable Cycle Time	10 Second ON/OFF MIN. / 10 Minute ON/OFF MAX. 10 Second Increments
Programmable Day Timer	24 hr Day Timer w/ two event settings
Power Supply	CE & UL Listed 12V DC Power Supply
Power Requirements	100V AC - 240V AC 1.5 AMPS max

scentair™

01753 725777

www.scentairuk.com